

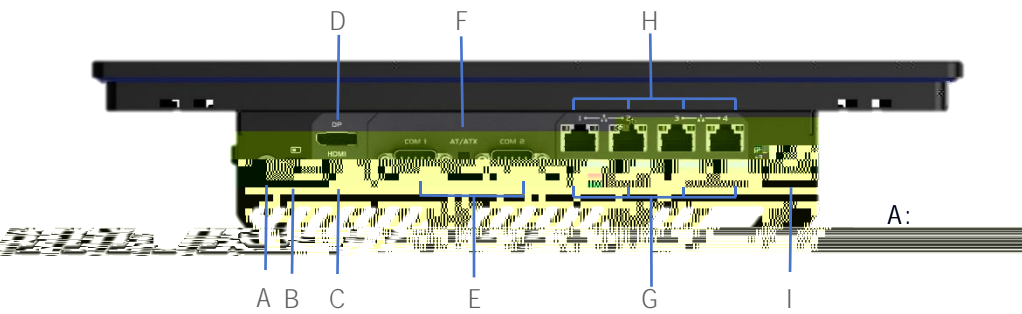

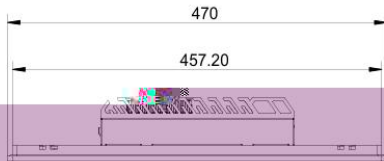



- 18.5
1920 1080
- /
-
- 2
- 2 232/
- 12-36
/

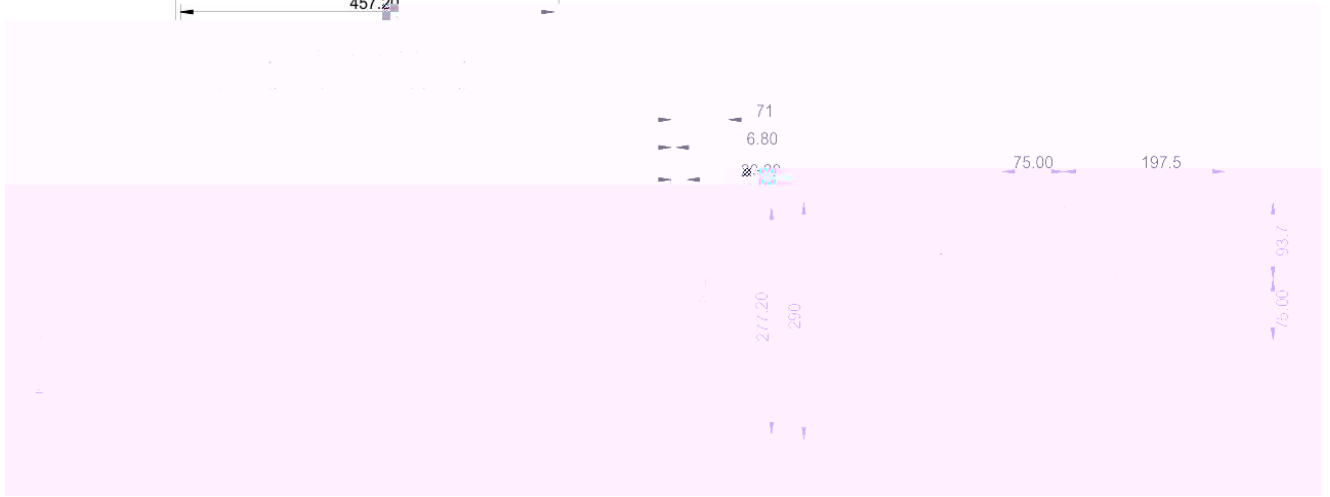



| | | | | | | | |
|----------|-------|---------|---|-----|---|---|---|
| -185 3 - | | 1920 10 | 8 | 256 | 2 | 4 | 2 |
| -8 - | 6412 | 80 | | | | | |
| -185 5 - | 3 | 1920 10 | 8 | 256 | 4 | 4 | 2 |
| 3-8 - | 1215 | 80 | | | | | |
| -185 5 - | 5 | 1920 10 | 8 | 256 | 4 | 4 | 2 |
| 5-8 - | 1235 | 80 | | | | | |
| -185 5 - | 7 | 1920 10 | 8 | 256 | 4 | 4 | 2 |
| 7-8 - | 1255 | 80 | | | | | |
| -185 5 - | 5 | 1920 10 | 8 | 256 | 4 | 4 | 2 |
| 5-8 - | 12450 | 80 | | | | | |
| -185 5 - | 7 | 1920 10 | 8 | 256 | 4 | 4 | 2 |
| 7-8 - | 12650 | 80 | | | | | |
| -185 5 - | 3 | 1920 10 | 8 | 256 | 4 | 4 | 2 |
| 3-8 - | 1315 | 80 | | | | | |
| -185 5 - | 5 | 1920 10 | 8 | 256 | 4 | 4 | 2 |
| 5-8 - | 1335 | 80 | | | | | |
| -185 5 - | 7 | 1920 10 | 8 | 256 | 4 | 4 | 2 |
| 7-8 - | 1355 | 80 | | | | | |
| -185 5 - | 5 | 1920 10 | 8 | 256 | 4 | 4 | 2 |
| 5-8 - | 13420 | 80 | | | | | |

, 06519034-6 ,65 ,100-240 ,19 ,3.42 ,
, ,0 +40 , ,

, -90 19,90 , 100 240 ,19 ,4.74 ,
, / / ,0 40 , ,

, 15019079-6 ,150 ,100 240 ,18.05
19.95 ,7.9 ,2 , ,0 40 , ,

, , - =1.5 , - 31
-2 5, 300/500 ,3 0.75 2, , , ,

I/O ,JL396-39602G01, ,2Pin,3.96mm,Copper Alloy,90 ,
,NA,NA, ,ASS,JinLing

, ()



| | |
|--|-------------------------|
| | |
| | - 16 |
| | - 32 |
| | .2 128 ,256 ,512 ,1 ,2 |
| | 2.5 128 ,256 ,512 ,1 ,2 |
| | 4 /5 |
| | & |
| | 2 232 |
| | -4 , 0.1 |
| | ,75 1 |
| | |
| | |

&

ý